Pro Lite™ 46

SPECIFICATIONS | Vision Master™ ProLite™ 46 | TSA4632HT

LCD	18.1" (45.6cm), active matrix, superfine TFT colour LCD Monitor + IPS. Pixel pitch 0.28mm x 0.28mm.
SYNC	Horizontal: 24.8-80KHz, Vertical: 56-85Hz.
BANDWIDTH	135MHz Dot Clock.
RESOLUTION	Maximum: 1280 x 1024 @ 75Hz refresh.
VIEWING ZONE	Horizontal 170°, Vertical 170°
COMPATIBILITY	All current PC and MAC graphic standards. Windows 95 Plug-and-Play (DDC1/2B).
DISPLAY AREA	359 x 287mm, 456mm viewable diagonal.
DISPLAY COLOURS	Unlimited colours depending on graphics card.
BRIGHTNESS	200cd/m2 nominal.
CONTRAST	>/=150
USER DISPLAY	On-screen display menus.
ADDITIONAL FEATURES	Integrated USB Hub (1 upstream, 4 downstream ports), 2 x 1W front firing speakers, Rotating screen (landscape/portrait viewing), Removeable base/VESA compliant mounting plate, no need for seperate power supply.
BACKLIGHT	8 x cold cathode ray tubes.
USER CONTROLS	3 push buttons accessing: Clock and Phase adjustment. Vertical position. Horizontal position. Brightness. Contrast. Red, Green and Blue Colour Balance. Preset Colour Temperature for 7500°K and 6500°K. Sync selection (SOG/separate sync). Language selection.
INPUT SIGNAL	15 pin mini D-sub connector.
POWER SUPPLY	Worldwide 90-132/198-264VAC. 50/60Hz input.
POWER USAGE	70W maximum in normal use. 4W in suspend mode.
POWER SAVING	Auto power down to standby mode. VESA-DPMS. EPA Energy Star and Nutek. (TCO-99) compliant.
LOW RADIATION	TCO-99 and MPRII compliant.
APPROVALS	CE mark. UL1950. CSA C22.2 No. 950. TÜV-GS. TÜV (MPRII). FCC Class B. TCO-99.
OPERATING TEMPERATURE	5-35°C
HUMIDITY	20-85% non-condensing.
ACCESSORIES	User manual. Power cable. USB cable SU41, Audio cable AD21, Signal cable, pivot software, display utility disk, cleaning cloth.
MANUFACTURE	All monitors manufactured using CFC free materials, non-toxic metals and non-bromided flame retardants, and are fully recyclable. Recycled material used for packaging and user documentation.

Weight 9.5kg

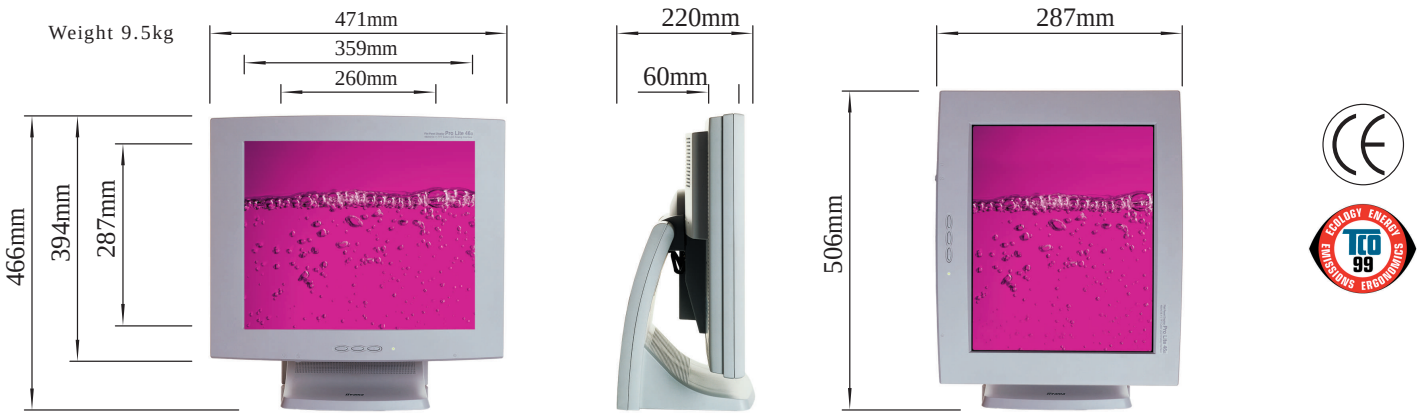

iiyama
a visible difference

IIYAMA ELECTRIC CO LIMITED
710-1 Kitaowaribe, Nagano-shi, Nagano 381, Japan.
Tel: +81 262 63 5120
Fax: +81 262 63 5121

IIYAMA ELECTRONICS AMERICA INC.
775 Anton Boulevard, Suite 590, Costa Mesa, CA 92626 USA.
Tel: +1 714 437 5111
Fax: +1 714 437 5982

IIYAMA BENELUX BV
Breguetlaan 10B, 1438 BC Oude Meer, The Netherlands.
Tel: +31 20 653 0797
Fax: +31 20 653 0800

IIYAMA ELECTRIC GMBH
Am Kiesgrund 2-4, 85622 Feldkirchen, Germany.
Tel: +49 89 9000 500
Fax: +49 89 9000 5050

IIYAMA UK LIMITED
1 Vincent Court, Fishers Green, Stevenage, Herts, SG1 2TP, U.K.
Tel: +44 (0)1438 745482
Fax: +44 (0)1438 745483

IIYAMA FRANCE
Les Espaces Multiservices, Lot No 23, Bld de Courcerin, 77183 Croissy-Beaubourg.
Tel: +33 1 60 06 2839
Fax: +33 1 60 06 2836

IIYAMA EUROPE LIMITED
19 The Courtyards, Croxley Business Park. Hatters Lane, Watford, Herts, WD1 8YH, England.
Tel: +44(0)1923 219050
Fax: +44 (0)1923 219048

IIYAMA NORDIC AB
Fingspangsgatan 54b, S163 53, Spanga, Sweden.
Tel: +46 8 795 6060
Fax: +46 8 760 8627

VISION MASTER™ is a trademark of iiyama Electric Co. Ltd.
All trademarks and registered trademarks acknowledged. E & O E. Specifications subject to change without notice.